



MCH 13-16/SH STAINLESS STEEL ERGO FRAME

PUMPING UNIT

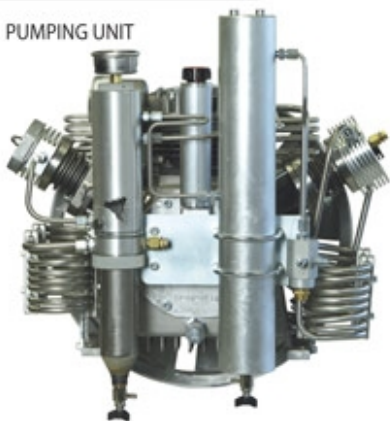

FILTRATION:
1 MAXIFILTRACTIVE CARBON AND MOLECULAR SIEVE

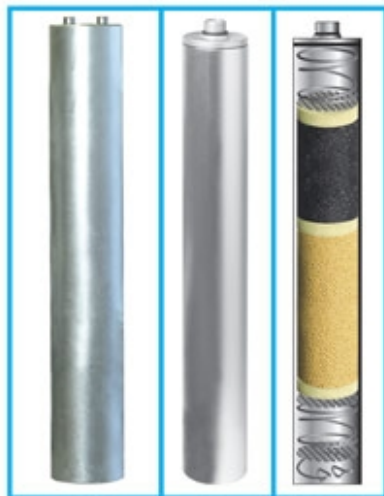

▶ Breathing air: DIN 3188 EN 12021 CGA E



FEATURES

DRIVEN BY	CHARGING RATE			STAGES AND CYLINDERS	FILLING TIME CYLINDER 15 L 0-200 Bar	WORKING PRESSURE	DIMENSIONS	DRY WEIGHT	SAFETY VALVE	POWER	NOISE
	L/min	m ³ /h	CFM								
Honda petrol engine	MCH 13 215	MCH 13 13	MCH 13 75	3	MCH 13 9 min	225 Bar - 3200 Psi 330 Bar - 4700 Psi	Height 69 cm Width 58 cm Length 113 cm	121 Kg	2 interstage 1 last stage	9 Hp	95,6 dB ISO 3746
	MCH 16 265	MCH 16 16	MCH 16 9		MCH 16 8 min						

MCH 13/SH Cod.
Honda GX 270 : SC100180/I
MCH 16/SH Cod.
Honda GX 270 : SC000240/I

OPTIONAL ACCESSORIES

- ▶ Electric start
- ▶ 300 Bar version



POWERED by HONDA.