


MCH 13, 16/ET TROPICAL PLUS MINITECH

TROPICAL PLUS PUMPING UNIT



FILTRATION: HYPERFILTER ACTIVE CARBON AND MOLECULAR SIEVE

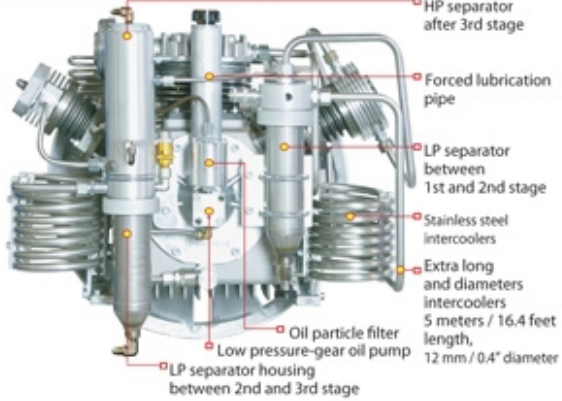

► Breathing air: DIN 3188 EN 12021 CGA E

FEATURES

DRIVEN BY	CHARGING RATE			STAGES AND CYLINDERS	FILLING TIME CYLINDER 15 L 0-200 Bar	WORKING PRESSURE	DIMENSIONS	DRY WEIGHT	POWER	NOISE
	L/min	m ³ /h	CFM							
Three-phase electric motor	MCH 13 215	MCH 13 13	MCH 13 7,5	3	MCH 13 9 min	225 Bar - 3200 Psi 300 Bar - 4300 Psi	Height 69 cm Width 54 cm Length 93 cm	MCH 13 130 Kg MCH 16 135Kg	MCH 13 4 Kw (230/400 V - 50/60 Hz) 4,8 Kw (440/480 V - 60 Hz)	MCH 13/16 82,3 dB ISO 3746
	MCH 16 265	MCH 16 16	MCH 16 9		MCH 16 8 min				MCH 16 5,5 Kw (230/400 V - 50/60 Hz) 6,6 Kw (440/480 V - 60 Hz)	

MCH 13/ ET Cod.

230 v - 50 Hz : SC000214/TP/MT
230 v - 60 Hz : SC000172/TP/MT
400 v - 50 Hz : SC000170/TP/MT
440 v - 60 Hz : SC000174/TP/MT

MCH 16/ ET Cod.

230 v - 50 Hz : SC000231/TP/MT
230 v - 60 Hz : SC000232/TP/MT
400 v - 50 Hz : SC000230/TP/MT
400 v - 60 Hz : SC000245/TP/MT

OPEN HANDLES FOR EASY MOVING



OPTIONAL ACCESSORIES

- Complete automatic switchboard: start/stop, auto drain with timer and auto/stop

